


HC710 CASE USER MANUAL



bit.ly/hawk-gaming-controller


1 Disassembly of left tempered glass side panel front tempered glass panel and right side panel

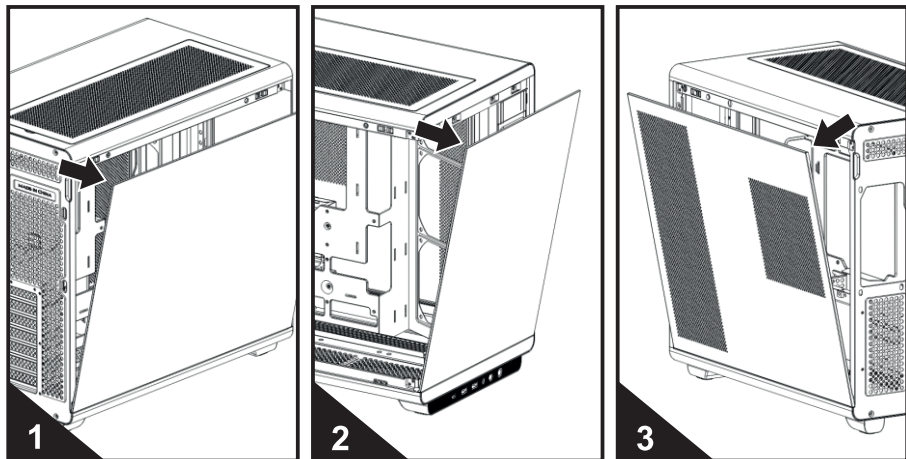

Push the left tempered glass side panel outward from the upper left corner according to the arrow direction as shown in the illustration to disassemble it
Push the front tempered glass outward from the upper left corner according to the arrow direction in the illustration to disassemble it
Push the right side panel outward from the upper right corner according to the arrow direction in the illustration to disassemble it


2 PSU installation (Support ATX PSU)

Install PSU in the positions as shown in the illustration, then fix it by 4 screws at **a** positions

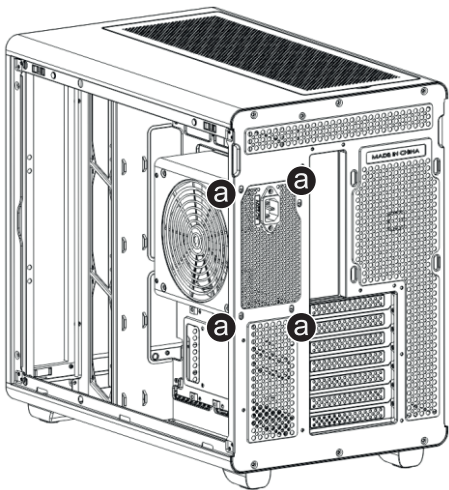


3 M/B installation (★★★ Support M/B back plug)

Put M/B in the case and align the screw holes, then fix M/B by screws as shown in the following illustration (this case support ATX /micro ATX and ITX M/B). (different M/B has different installation characteristics, please refer to the user manual of your M/B before installation.)

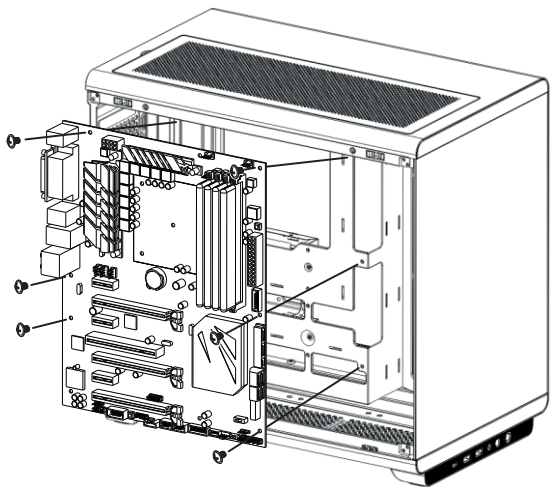


4 VGA card installation

① VGA card standard(horizontal) installation

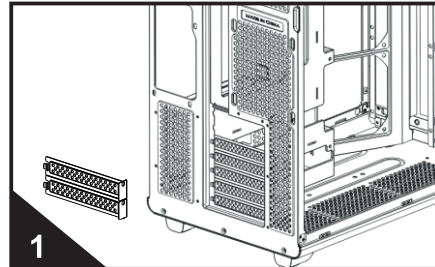


Unscrew the screws of the fastening bar of the PCI slot covers remove the fastening bar

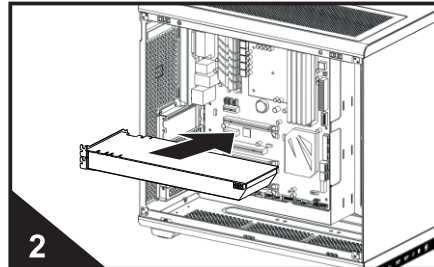


Insert VGA card into the slot of M/B according to the arrow direction; Fix VGA card by screws


② VGA card vertical installation (optional)

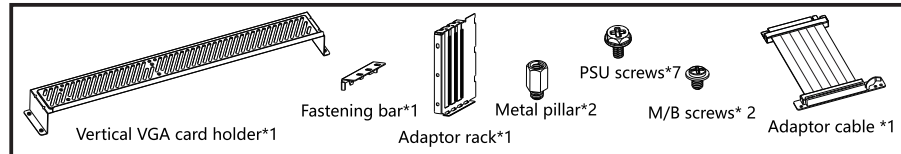


VGA card vertical installation kit is optional, need to buy separately

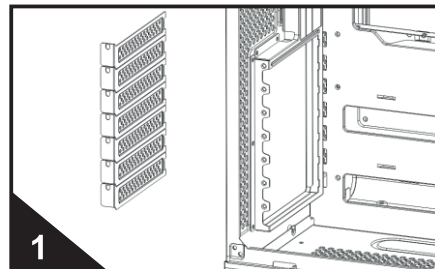


Remove all the PCI slot covers

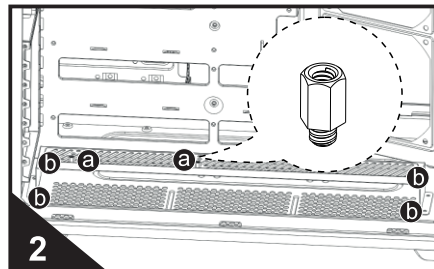


1.Install 2pcs metal pillars at **a** positions of the VAG card holder as shown in the illustration
2.Secure the VGA card holder on bottom panel at **b** positions by screws

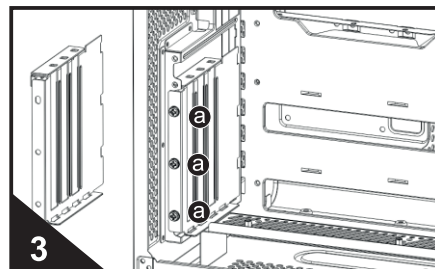


Install the adaptor rack in the position of the lower 6 PCI slots as shown in the illustration secure the adaptor rack at **a** positions by screws

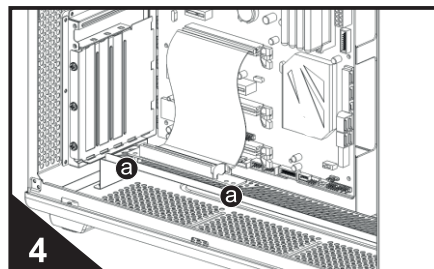

Insert one connector of the adaptor cable in the VGA card slot of M/B, and secure another connector of the adaptor cable on the VGA card holder at **a** positions by screws

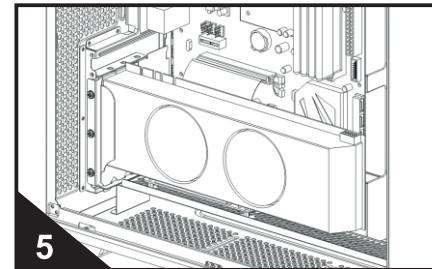


Insert VGA card in the slot of the connector of the adaptor cable which was secured on the VGA card holder

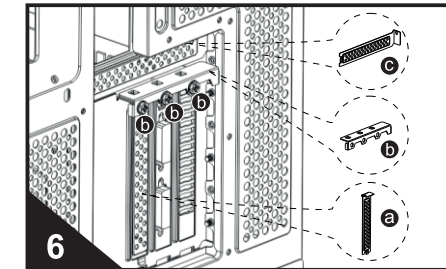


1.Cover the innermost slot of the adaptor rack by PCI slot cover after install VGA card (figure **a**)
2.Install the fastening bar on the top edge of the adaptor rack, as shown in the illustration align its 3 hooks with the 3 tiny slots on the top edge of the adaptor rack, secure the fastening bar at **b** positions by 3 screws (figure **b**)
3.Re-cover the PCI slot which is above the installed VGA card by a PCI slot cover (figure **c**) and secure it by screw

5 HDD/SSD installation (Support HDD*2+SSD*1 or HDD*1+SSD*2)

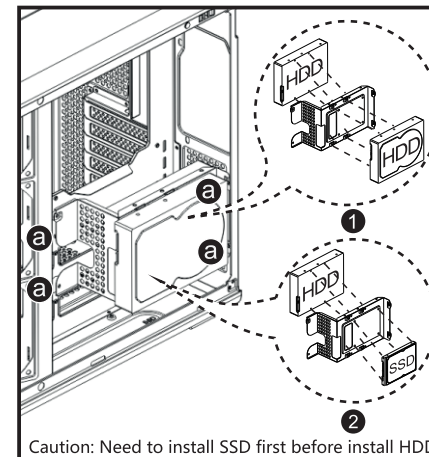

1.Firstly knock down the HDD/SSD bracket
2.Install 2*3.5"HDD (figure **1**) or 1*3.5"HDD+1*2.5"SSD (figure **2**) on the HDD/SSD bracket
3.Finally re-install the HDD/SSD bracket in the locking slots on the bottom panel, secure the bracket from the bottom at **a** positions by screws

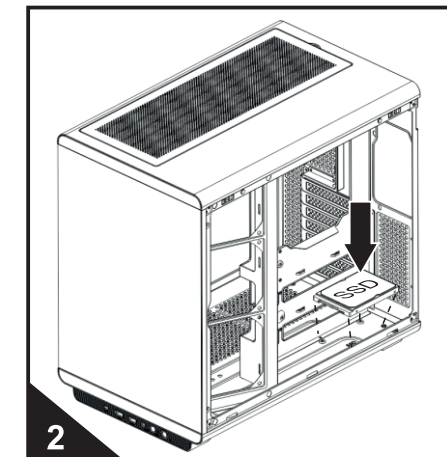

Put 2.5"SSD*1 on bottom panel secure it by screws from the bottom

6 Cooling device compatibility

Top panel: 3*12cm fan or 1*360 water cooling kit
(before install water cooling kit need to remove the magnetic top cover)
Rear panel: 1*12cm fan or 1*120mm water cooling kit
Bottom panel: 3*12cm fan
M/B bracket: 3*12cm fan